

Filters, Water & Instrumentation, Inc.


Depth Filters - String Wound Cartridges



Depth String Wound filter elements at their finer micron ratings rely mostly on Van Der Walls or attractive forces for their small particle capture. With this in mind, using Depth String Wound cartridges or any Depth cartridge, flow is a critical factor in the filter's performance.

A TIE or Ten Inch Equivalent is the way we normalize the operating parameters of cartridge filters. With String Wound depth cartridges, optimum dirt holding capacity and particle removals at the stated micron rating occur at flow rates between 2 and 3 Gallons Per Minute per TIE. Above that flow per TIE, you get reduced life and dirt holding capacity.

Other factors include not letting the dirty pressure drop exceed 20 PSI. Unloading of particles occur at higher pressures as flow forces overcome the Van Der Walls forces.

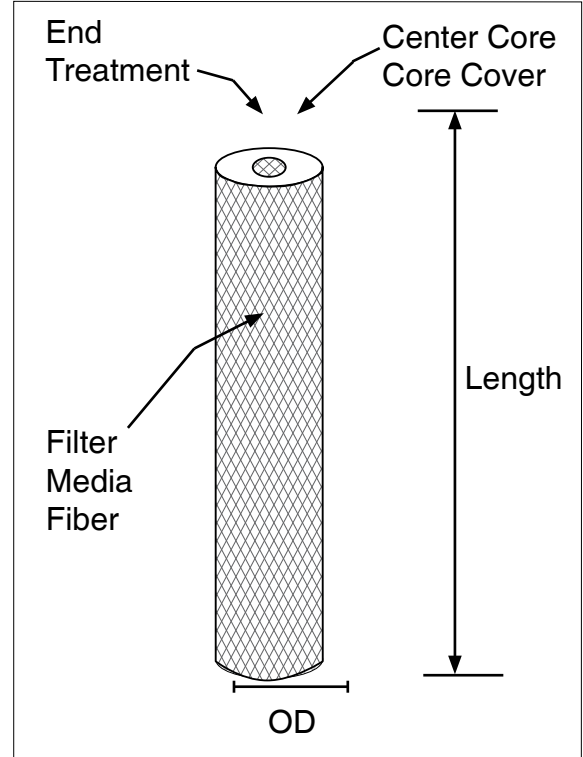

<u>Filter Media</u>		<u>Micron Ratings</u>	<u>Length In Inches</u>	<u>Center Core</u>	<u>Options</u>		
Polypropylene	P	0.5	5	Polypropylene	P	FDA Fiber	F
Polypropylene-Fibrilated	PF	1	10	Tin	T	Core Cover	C
Bleached Cotton	C	2	20	304 Stainless	A	Extended Core	X
Natural Cotton	CU	3	30	316 Stainless	S	End Treatment	E
Rayon	R	5	40	Nylon	N	4-1/2" Diameter	H
Nylon	N	10	50			2-1/2" Diameter	A
Acrylic	A	15	9-3/4 = 9.8				
Jute	J	20	19-1/2=19.5				
Teflon	PTF	25	29-1/4=29.4				
Polyester	PE	30					
Aramid	AR	40					
		50					
		100					
		150					
		200					

Part Number Example: C5A10P Bleached Cotton, 5 Micron, 10" Long, Wound on Polypropylene Center Core. A is 2-1/2" Diameter, H is 4-1/2" Diameter.

FILTERS, WATER & INSTRUMENTATION, INC.
 www.FiltersWater.com
 23 Londonderry Road, Unit 13
 Londonderry, NH 03053
 PH 603 434-9577 FX 603 434-2832

NOTE: Special cartridges are available. Submit your specifications along with a sketch for a price quotation.